


> Our technology. Your success.
Pumps • Valves • Service



LX and DX – 100 mm (4"), Single phase, submersible motors with CORA pumps

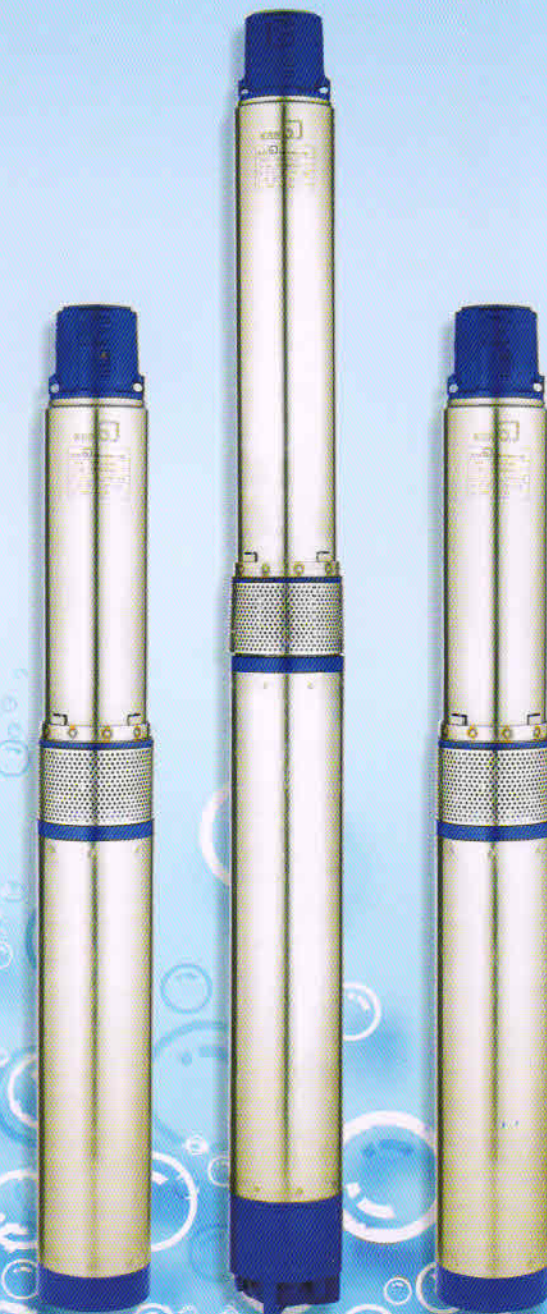

CORA 4C+LX CORA 7C+DX CORA 4C+LX

LX and DX – 100 mm (4"), Single phase, submersible motors with CORA pumps



Applications

- Domestic water supply
- Drip / Sprinkler irrigation
- Farm House
- High rise buildings
- In-well bore
- Fire fighting
- Industries


Special features

- Available in LX and DX executions
- Optimized design
- High efficiency ensuring lower power consumption
- Corrosion and abrasion free internals
- Special thrust bearing design
- Stainless Steel jacket
- Copper rotor
- Noiseless operation
- Suitable for 220 V operation

Operating Range

Model	Max. discharge up to (lpm)	Max. head up to (m)	Motor rating kW (HP)
CORA 1C	30	275	0.37-1.5 (0.5-2.0)
CORA 2C	50	410	0.37-3.7 (0.5-5.0)
CORA 2CH	65	363	0.37-3.7 (0.5-5.0)
CORA 3C	90	257	0.37-3.7 (0.5-5.0)
CORA 3CH	100	256	0.55-3.7 (0.75-5.0)
CORA 4C	100	237	0.55-3.7 (0.75-5.0)
CORA 7C	170	150	0.75-2.2 (1.0-3.0)
CORA 12C	240	99	1.5-3.7 (2.0-5.0)
CORA 18C	400	70	1.5-3.7 (2.0-5.0)

- 2.2 kW (3 HP) and above available only in DX execution.

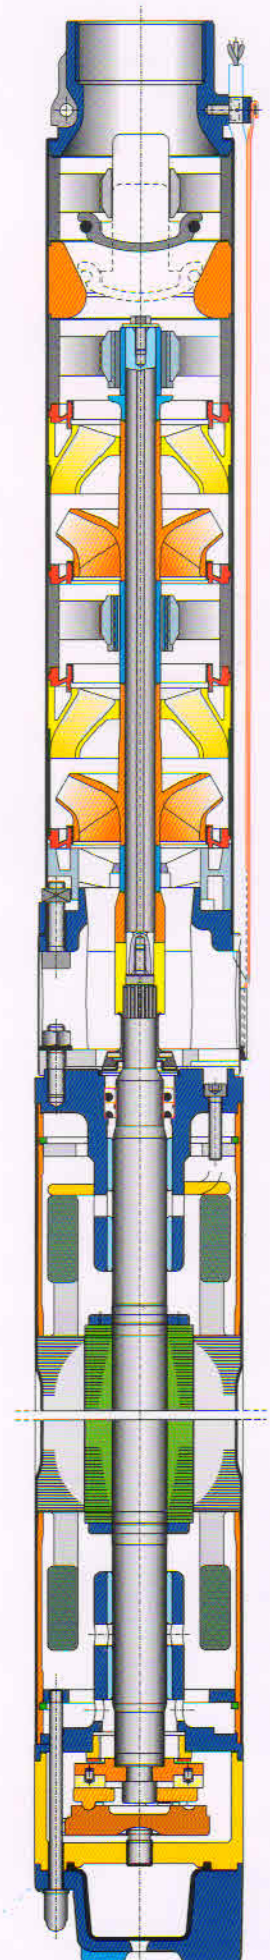

KSB Pumps Limited
 Standard Pumps Division
 Plot No. E3 & E4, MIDC Sinnar, Nashik - 422 113.
 Tel.: +91-2551-230252 / 253, 229700 Fax : +91-2551-230254 www.ksbindia.co.in

Subject to technical modification without prior notice.

3402.021